
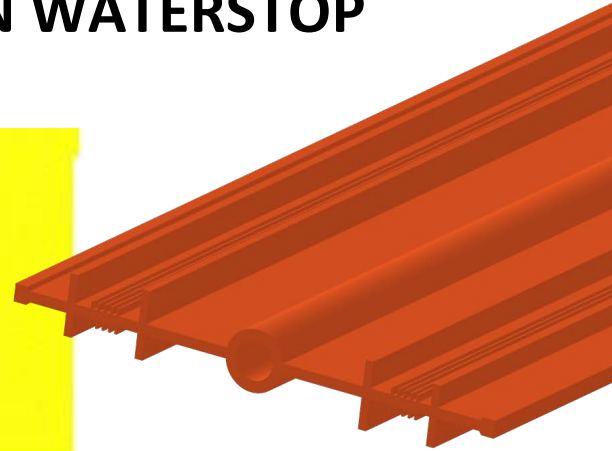


# XTCB250 INTERNAL EXPANSION WATERSTOP

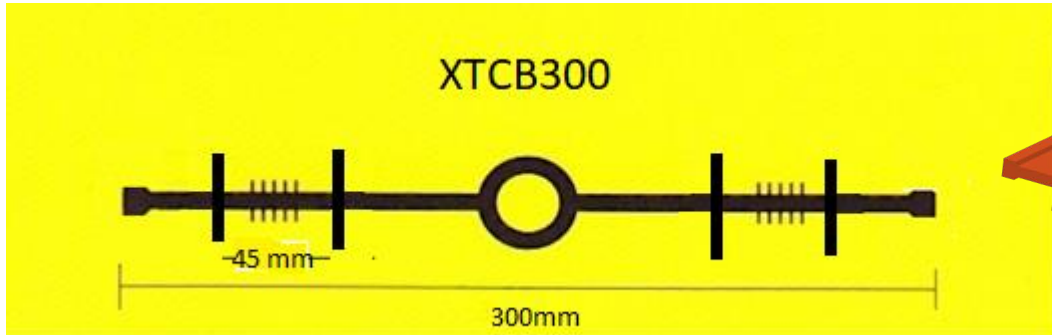

Property	Test Method	Units Value
Relative Density- S.G.	EN ISO 1183 Method A	1.50
Softness Shore A Hardness	EN ISO 868	80 +/- 5
Tensile Strength MPa	EN ISO 527-2	12.00
Extension at Break - %	EN ISO 527-2	≥230

PVC compound conforms with US Corps of Engineers specification CRD-C 572-74

Roll length 10M

Pallet loading 16 rolls x 10M

## Joins

Joins made to order – standard configurations:

Vertical L Flat L Vertical T Flat T Flat X

Other configurations as required against suitable data

11 October 2018